



HP Envy 14 Screen Replacement

Got a cracked or broken screen that needs to be replaced? This guide will walk you through how to remove your unwanted screen and put in your new screen!

Written By: Noelle Ly



INTRODUCTION

This guide will walk you through 9 easy steps to replace your HP Envy 14 Notebook screen! Before following this guide, you should order and receive the replacement screen and find an open space to work on.



TOOLS:


- [4mm Phillips Screwdriver](#) (1)
- [3mm Phillips Screwdriver](#) (1)
- [Plastic Cards](#) (1)



PARTS:

- [14.0" HD BrightView WLED Screen](#) (1)

Step 1 — Screen

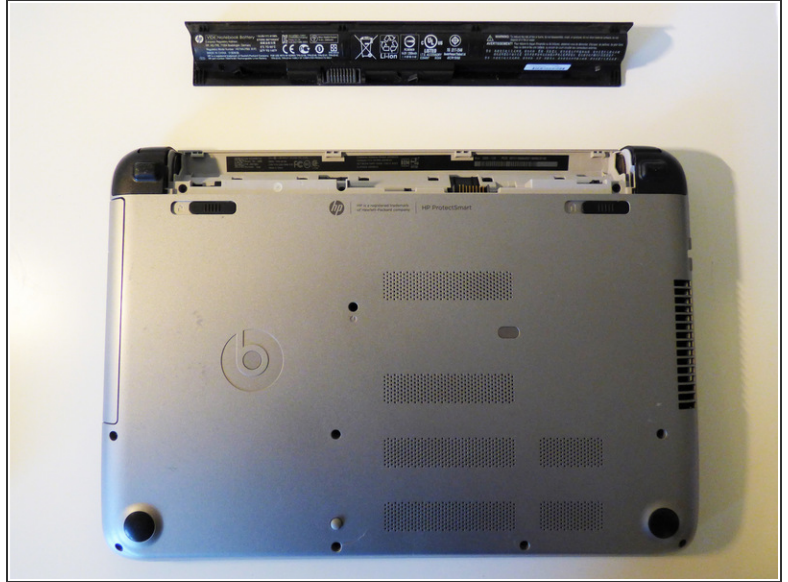

- With your laptop turned off and facing down, locate the battery.
- Slide and hold the black tabs while removing the battery. One of the black tabs may lock in place once slid over.

Step 2



- Flip your laptop back over and open it up.
- ⓘ The black circles are stickers.
- Peel off the 2 black stickers directly above the two hinges to reveal the screws.

Step 3




- Use the 4mm Phillips Srewdriver to remove the 2 screws you just uncovered.
- ⓘ Make sure to put the 2 screws in a safe place so that you don't lose them! A small bowl or container would work perfectly.

Step 4



- Use the plastic card or your fingernail to separate the black plastic border from the screen case.
- ⓘ You will hear a snapping sound but don't worry, you are not breaking the plastic, the border will snap right back into place!

Step 5

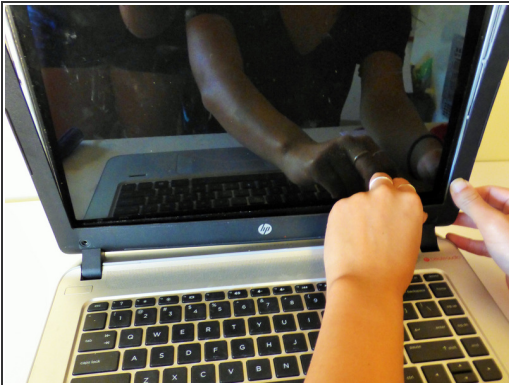


- Separate the border entirely by unsnapping the plastic snaps all the way around the screen until you can remove the border.

Step 6



- Use the 3mm Phillips Screwdriver to remove the 4 black screws found on the metal tabs above and below the corners of the screen.
- ⓘ Don't get confused with the other black screws on the top corners. The ones you want to remove are located closer to the middle of the screen.
- ⓘ Lean the laptop cover back and unscrew the bottom 2 screws first so that the screen doesn't fall over as you are removing the screws.
- ⓘ Put these 4 screws in a separate container so they do not get mixed up with the 2 screws you already removed.

Step 7

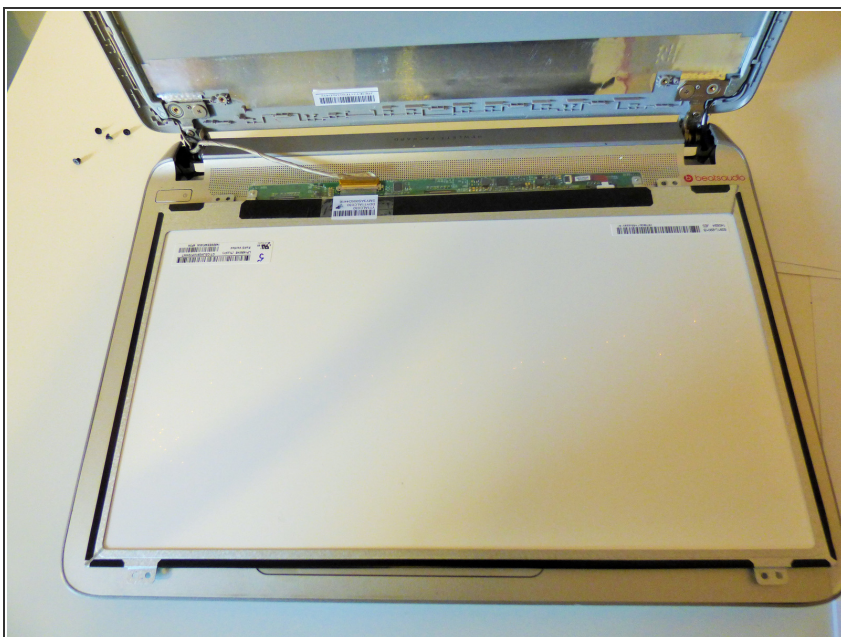

- Now that the screen is not screwed in, place it face down on the keyboard.

Step 8



- Gently peel off the bar code sticker that is connected to the video cable connector.

Step 9



- Remove the video cable from the connector by gently pulling the gray tab out.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-08-02 08:40:45 AM.